
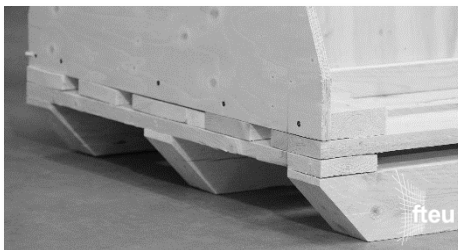
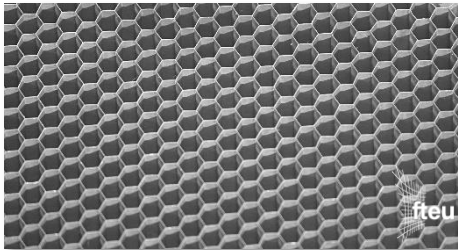


Product presentation

fteu® precision rectifiers

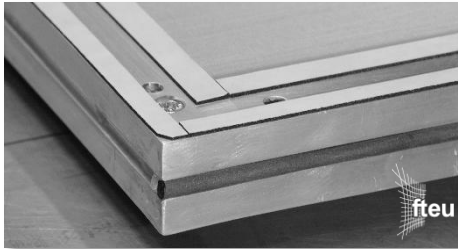

fteu® design for ideal fit and air flow

- **Dimensions:** customer-specific dimensions; rectifier length of up to 6000mm; honeycomb height of 30mm or 50mm
- **Material:** stainless steel metal mesh; aluminium honeycombs; aluminium frame

Function in 3 qualities (Premium, Precision, Industrial)

- **Functional Dispersion:** precision metal mesh (5.9 million channels/m²; fteu® work norm based on ISO 9044), flat-walled honeycomb channels
- **Seamless Fit:** flat lie of frame, exact position of mounting holes
- **Dispersion Excellence:** even and tight metal mesh over entire surface, even mesh channel distribution, minimized mesh deformations
- **Operator Convenience:** uniform surface appearance (minimized color gradients and weft wire changes)
- **Optical Excellence:** honeycombs with even cell sizes (fteu® premium quality; SAE AMS-C-7438A)

Services for speed and customer value

- **Logistics:** safe logistics in reusable fteu®-boxes and shock sensors
- **On-site support:** convenient on-site measurement or measurement protocol for accurate dimensions
- **Repair:** flexible repair service for wire mesh & honeycombs

Ind.
Precision
Premium

Contact us today

Jenö Inderfurth
Technical Sales
jin@fteu.de
+49 (0)2452 97606 27



Available in standard specifications



Available as customized engineered elements



Available as repair service

Fluid Filtration

Fluid Dispersion

Precision Assembly

Sound Absorption

Heat Absorption

Better Function in Metal Mesh

© filtertechnik.Europe